

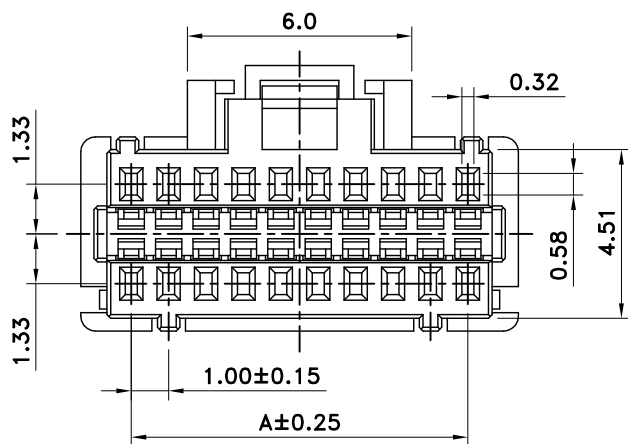
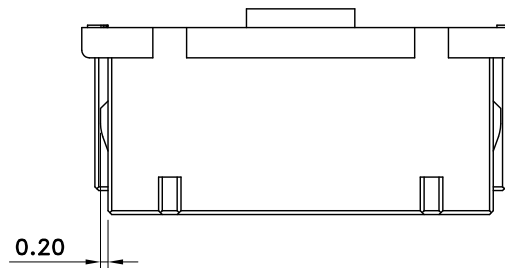
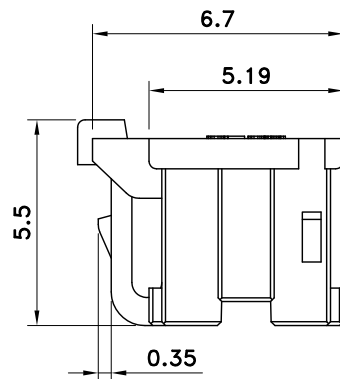
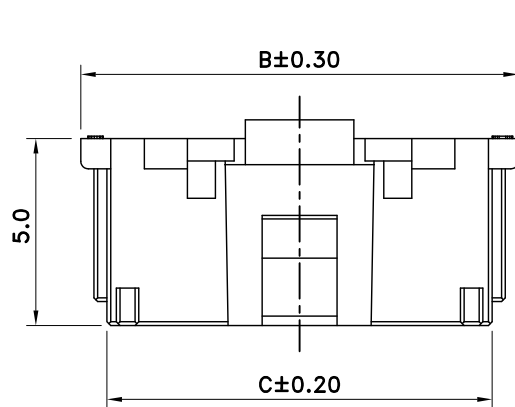


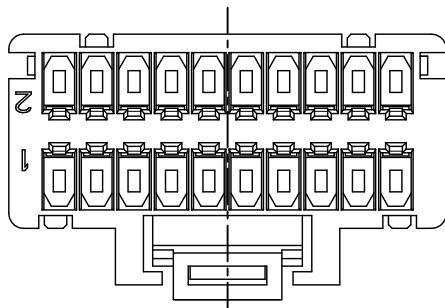

SPECIFICATIONS

- Voltage Rating: 50V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 250V AC/minute
- Insulation Resistance : 100MΩ min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance: 20mΩ Max.

RECEPTACLE

- Part No. : GJS-1032D-XXx2 HK XX
① ② ③

① Poles : 08x2~25x2

② HK : 鎖扣結構

③ Color :

Blank : Natural(White)

GY : Gray

BK : Black

- Material : Nylon 66 UL94V-0
- Use With: GJS-1032-TPX Terminal
- Packing : Bag




Poles	Dimension(mm)		
	A	B	C
08x2	7.00	9.70	8.30
10x2	9.00	11.70	10.30
12x2	11.00	13.70	12.30
15x2	14.00	16.70	15.30
20x2	19.00	21.70	20.30
25x2	24.00	26.70	25.30





东莞乔唯电子有限公司
DONGGUAN CHYAO WEI
ELECTRONIC CO., LTD

PART NO/GJS-1032D-XXx2HKXX
1.00mm Housing Dual-Row


APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞		mm	.0 ±0.30	△				△			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	△				△			
曾慶根	⊕	a	.000 ±0.10	△				△			
DRAWN BY	DATE	SIZE	ANGLE	△					CUSTOMER		
曾慶根	2021/03/19	A4	0° ±1°	△							
			.0° ±	△							
			SHEET 1/1	△					Conforms to The RoHS Instruction		

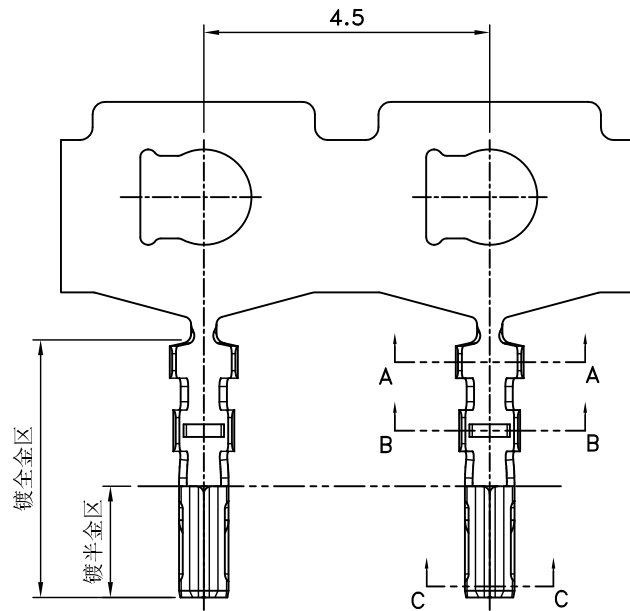

Section A-A

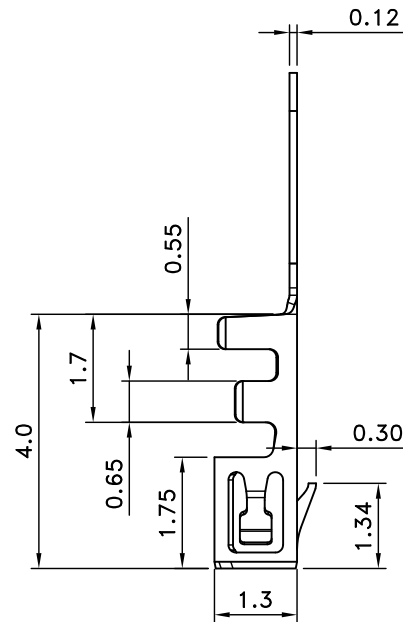

Section B-B

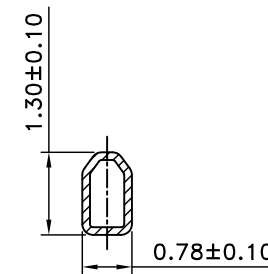

View C

■ SPECIFICATIONS

- Voltage Rating : 50V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 250V AC /minute
- Insulation Resistance : 100M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : Initial Value : 20m Ω max
After Environmental Testing : 40m Ω max

■ TERMINAL

- Part No. : GJS-1032-TP XX
①

① Plated :

Blank: Tin Plated (Standard Type)

NM: Matte Tin Plated

SG : Gold Flash(鍍半金)

G : Gold Flash(鍍全金)

G5 : 30u"Au over 50u" NICKEL
(鍍全金30u", 鍍底50u")

- Applicable Wires : AWG# 28 - 32
- Material : Phosphor Bronze (先冲后鍍)
- Thickness : 0.12mm
- Q' ty : 20,000 Pcs./Reel
- Mates With: GJS-1032&1032D-XX Housing



东莞乔唯电子有限公司
DONGGUAN CHYAO WEI
ELECTRONIC CO., LTD

PART NO GJS-1032-TPXX

1.00mm Crimp Style Connectors Terminal

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞		mm	.0 ±0.30	△				△			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	△				△			
劉娜	⊕	a1	.000 ±0.10	△				△			
DRAWN BY	DATE	SIZE	ANGLE	△							
曾慶根	2022/5/19	A4	0° ±1°	△							
			.0° ±	△							
			SHEET 1/1	△							

CUSTOMER

Conforms to The RoHS Instruction